
STEELCRAFT®

TYPICAL HARDWARE LOCATIONS — Doors & Frames with 3 Hinges (11/2 Pair)

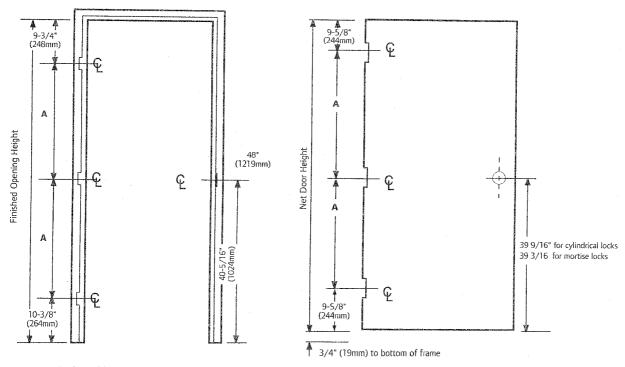

TYPICAL FRAME ELEVATION

TYPICAL DOOR ELEVATION

TYPICAL HARDWARE PREPS

Chart 7

Door Opening Height	Dimension A
6'8"	29 ¹⁵ /16"
(2032mm)	(760mm)
7'0"	31 ¹⁵ ⁄16"
(2134mm)	(811mm)
7'2"	32 ¹⁵ ⁄16"
(2184mm)	(837mm)
7'6"	34 ¹⁵ /16"
(2286mm)	(887mm)

NOTES:

- 1. 3 hinges (1 1/2 pair) are standard on 6'-8", 7'-0" 7'-2" and 7'-6" openings
- 2. **Steelcraft standard locations** hardware preps (hinge and lock) with standard 3/4" undercut are located as illustrated above and as noted in chart 1.
- 3. **Special door undercuts** hardware locations shown from the bottom of the door will be adjusted accordingly. Locations will be held from the top of the door.
- 4. Special door heights Special door heights are available. Dimension "A" will vary accordingly.
- 5. Refer to the hardware section of this manual for all hardware locations and most prep details.